

LOAD BANK KPLB-5625



KEYPOWER LOAD BANK:

- * Frequency: 50/60 Hz;
- * Voltage range: AC 110-690V;
- * Duty: Continuous;
- * Cooling system: Industrial grade axle fans;
- * Discharged air direction: horizontal for 100 kw, vertical for larger models;
- * Control power phase: Single-phase, two-wire for 500 kw and below; three-phase, four-wire for larger models.

GENERAL SPECIFICATIONS

| | | |
|--|-----------------------------|--|
| | Model | KPLB-5625 |
| | Capacity | 5625KVA / 4500kW |
| | Type of load | Resistive & inductive load |
| | Power factor | 0.8 / 1.0 |
| | Duty cycle | Continuous |
| | Cooling system | Industrial grade axial fan |
| | Cooling mode | Forced air-cooled |
| | Airflow | Vertical discharge |
| | Phase | Available at both single and three phase |
| | Rated testing voltage | 3P3W 110 - 690V |
| | Rated frequency | 50Hz / 60Hz |
| | Number of fans | 14 |
| | Control power input voltage | 3P4W 220 - 480V |



FREQUENCY



DRY TYPE



FORCED AIR COOLED



SOUNDPROOF




CERTIFICATION



ISO 9001

Dimension and Weight

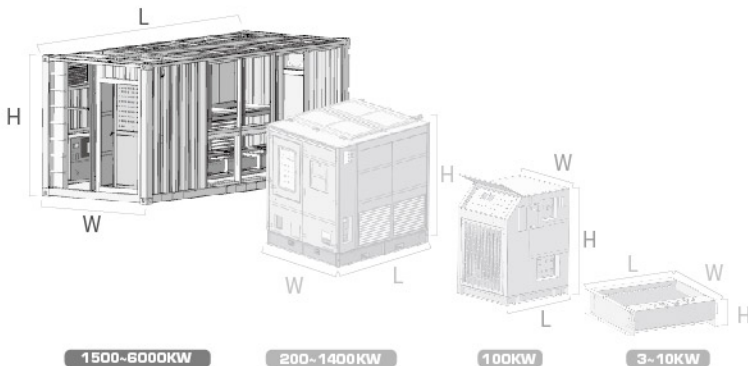

DIMENSION

KPLB-5625

| | | | |
|--|------------|----|-------|
| | Length (L) | mm | 12192 |
| | Width (W) | mm | 2438 |
| | Height (H) | mm | 2896 |
| | Weight | kg | 29000 |

KEYPOWER has the right to modify any feature without prior notice. Weights and dimensions based on standard products. Illustrations may include optional equipment. Technical data described in this catalogue correspond to the available information at the moment of printing. The illustrations and images are indicative and may not coincide in their entirety with the product. Industrial design under patent.

Technical Specifications

| PERFORMANCE PARAMETER | |
|------------------------------------|---|
| Ambient Temperature | -10°C ~ +55°C |
| Relative Humidity | ≤98% ventilated environment without explosive or corrosive dust |
| Altitude | ≤3000m above sea level |
| Wire Connection | Socket / Terminal |
| Load Tolerance (each step) | ±5% |
| Load Tolerance (overall) | ±3% |
| Enclosure | ISO 40HC Container |
| Parameter measuring accuracy grade | 0.5 |
| Noise level | 86 dBA @ 1m |
| Enclosure protection class | IP 54 |
| Forklift handling | No |

| CONTROL PANEL | |
|--------------------------|--|
| Control mode (Standard) | Local manual control |
| Control mode (Optional) | Intelligent / remote control |
| Remote control distance | ≤100 m |
| Load step | 10kW*4, 20kW*3, 50kW*2, 100kW*9, 200kW*17 / 8kvar*4, 15kvar*3, 38kvar*2, 75kvar*9, 150kvar*17 (non-intelligent type) 10kW*13, 20kW*6, 50kW*7, 100kW*7, 200kW*16 / 8kvar*13, 15kvar*6, 38kvar*7, 75kvar*7, 150kvar*16 (intelligent type) |
| Load bank protections | Fan failure alarm/Overload alarm/Overvoltage alarm/Overheating alarm/Low airflow alarm/Maintenance door open alarm/Control power failure/Fault reset |
| Multi functions display | voltage, current, load power, reactive power, apparent power, power factor, frequency etc. |
| One-step load/unload | Yes |
| Emergency stop | Yes |
| Phase sequence indicator | Yes |

Optional Items for Load Bank:




- Capacitive/Inductive/Resistive load bank with different power factor
- Intelligent control
- Laptop for remote control
- Generator tester
- Multi-voltage
- Water-proof cover for air outlet (200-1400KW)
- Air deflecting duct for containerized load bank
- Space heater
- Cable connector
- Galvanized sheet canopy
- Wheels for < 500KW load bank
- Trailer

| RESISTOR FEATURES | | 304 STAINLESS STEEL RESISTORS |
|------------------------|------------------------------|-------------------------------|
| Material | Stainless steel | |
| Cooling mode | Forced air cooling | |
| Temperature resistance | 500 ~ 600°C | |
| Load Tolerance | ±5% | |
| Warranty | 3 years with unlimited hours | |

| INDUCTOR FEATURES | | INDUCTIVE TYPE |
|------------------------|-----------------------------|----------------|
| Insulation level | Class H | |
| Operating temperature | -25 ~ 60°C | |
| Flame retardant rating | UL94 - V0 | |
| Surface treatment | Conformal coating | |
| Fastener treatment | Hot-dip galvanized | |
| Overall treatment | Vacuum impregnation varnish | |

Control Panel

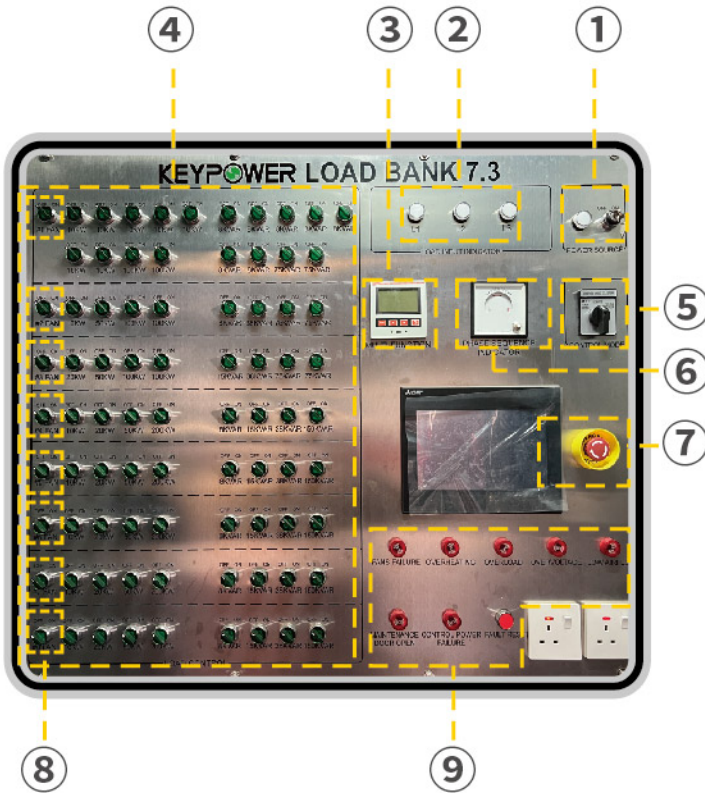

| MANUAL CONTROL | FUNCTION |
|------------------------------|--|
| ① Turn on / off power source | Tested power source input |
| ② Load input indicator | Indicate U V W load input normal or not |
| ③ Multi-function meter | Show testing parameters |
| ④ Master load on / off | One step loading / unloading |
| ⑤ Control mode selection | Choose control mode: Local manual control / Touch screen control / Remote control |
| ⑥ Phase sequence indicator | Indicate phase sequence of tested power right or not |
| ⑦ Emergency stop button | Emergency stop |
| ⑧ Load Steps | Loading / unloading |
| ⑨ Alarm | Load bank protection: Fan failure alarm / Overload alarm / Overvoltage alarm / Overheating alarm / Low airflow alarm / Maintenance door open alarm / Control power failure |

In addition to all manual control functions, Intelligent/remote control also contains the following functions:

- Touch screen control/remote control
- Auto loading/unloading test
- Data setting

Intelligent control system with **Mitsubishi**[®] PLC



KEYPOWER Fuzhou GFF KEYPOWER Equipment Co., Ltd.

| MANUAL | LL VOLTAGE | CURRENT | P / Q / S / POWER |
|---------|---------------------|--------------------|-----------------------|
| MANUAL | U _{ab} 0 V | I _a 0 A | P 0 KW COSφ 0.00 |
| AUTO | U _{bc} 0 V | I _b 0 A | Q 0 KVAR FPF 0.0 HZ |
| SETTING | U _{ca} 0 V | I _c 0 A | S 0 KVA ON LOAD 0 MIN |

RATED POWER 1000 KW **CONFIRM**

LOAD SETTING

START PAUSE STOP

PF CHOICE

PF=1.0 PF=0.8

ON LOAD DURATION

OFF LOAD DURATION

SENSSET RATED VOLTAGE: 0 V

Intelligent Control Interface